Owner's Manual

1111 W. 35th Street,
Chicago, IL 60609
Customer Support: (773) 869-1234
www.tripplite.com

HDTV Multimedia Wall Plate

Model: A152-000-2

Your A152-000-2 HDTV Multimedia Wall Plate comes preloaded with the most common couplers for multimedia in-wall cable installation. You can customize your wall plate by switching any of the pre-installed keystone inserts with the alternate ones supplied in the package.

Removing a Keystone Insert from the Wall Plate

You can remove any of the keystone inserts from the wall plate by using a small, flathead screwdriver. With the wall plate laying on a flat surface, insert the blade of the screwdriver between the insert's snap-in tab and the wall plate (as shown) and press the tab down toward the insert until the insert snaps out of the port.

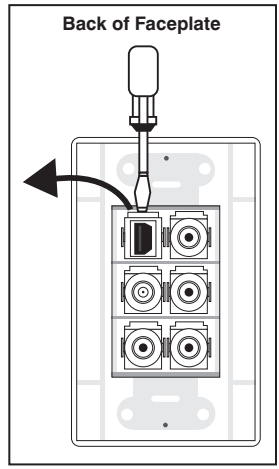

Removing a Coupler from a Keystone Insert

1) Using both hands, hold the keystone insert between both of your thumbs and forefingers. Make sure the tabs that hold the coupler in place are facing upward.

2) Use your forefingers to gently pull each tab away from the coupler.

3) Using both thumbs, push the coupler upward until it can be removed from the keystone insert.



Copyright © 2008 Tripp Lite. All rights reserved. All trademarks are the property of their respective owners.
Tripp Lite follows a policy of continuous improvement. Product specifications are subject to change without notice.

93-2772 200801148